

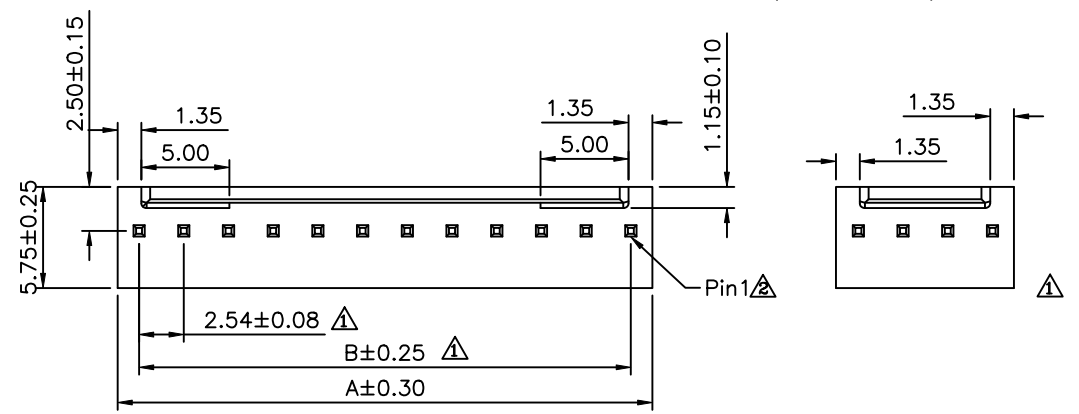
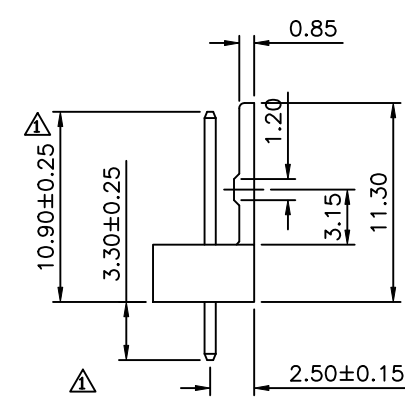


△ SPECIFICATION
 Current Rating: 4A AC/DC
 Voltage Rating: 250V AC/DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 1000V AC/Minute
 Insulator: PA66(UL94V-0), Beige
 Contact: Brass, Tin Plated Over Nickel
 RoHS Compliant



- △ MK XX D -H
 (1) (2) (3) (4)
- (1) MK: 2.54 MK
 - (2) XX: No. of Position/Per Row
 - (3) D: DIP Straight Male Wafer
 - (4) H: RoHS Compliant

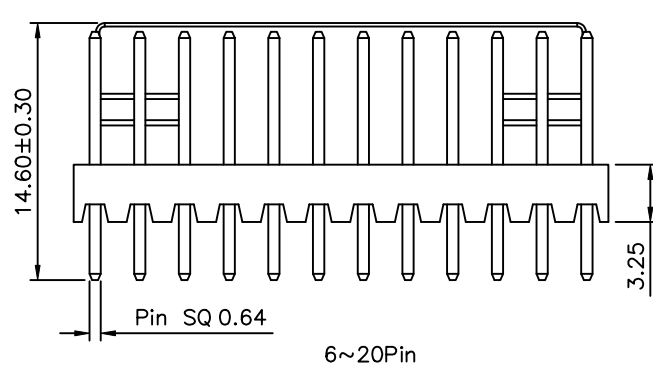

Pin	A	B
2	4.98	2.54
3	7.52	5.08
4	10.06	7.62
5	12.60	10.16
6	15.14	12.70
7	17.68	15.24
8	20.22	17.78
9	22.76	20.32
10	25.30	22.86
11	27.84	25.40
12	30.38	27.94
13	32.92	30.48
14	35.46	33.02
15	38.00	35.56
16	40.54	38.10
17	43.08	40.64
18	45.62	43.18
19	48.16	45.72
20	50.70	48.26

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.20 .XXX ±0.10 .X ±.2 .XX ±.1				
PART No.	MKXXD-H	CHECKED BY	MEI		△ A3	Modify Finish	HZF	04/22/2010
DRAWING No.	MKXXD-H	DRAWING BY	HZF		△ A2	Modify Data	HZF	02/01/2010
SCALE	NONE	REV.	LXX		△ A1	Modify Data	HZF	12/09/2009
			A3	△ A0 <th>NEW RELEASE</th> <th>HZF</th> <th>11/29/2006</th>	NEW RELEASE	HZF	11/29/2006	
				NO. REV.	REVISIONS	CHK	DATE	