
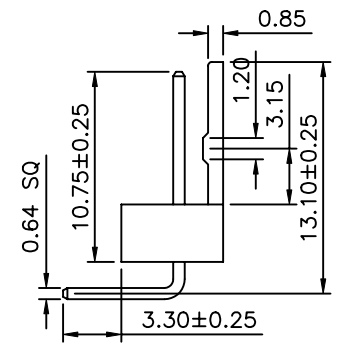
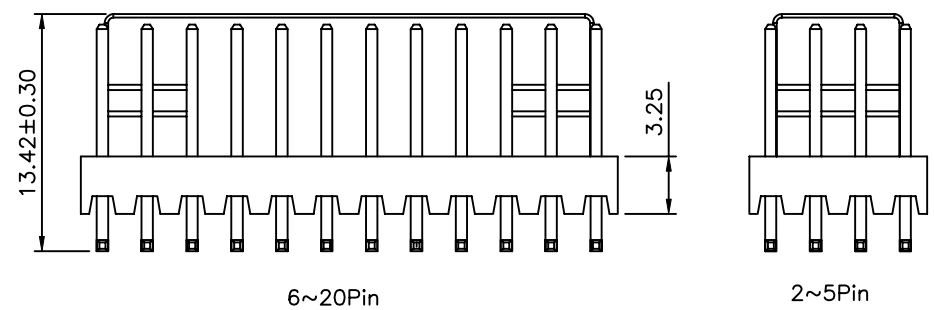


Recommended P.C.B Layout(Top Side)
P.C.B Thickness=1.20mm
(Tolerance±0.05)

SPECIFICATION
Current Rating:4A AC/DC
Voltage Rating:250V AC/DC
Withstanding Voltage:1000V AC/Minute
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
Housing:PA66 UL94V-0,Beige
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

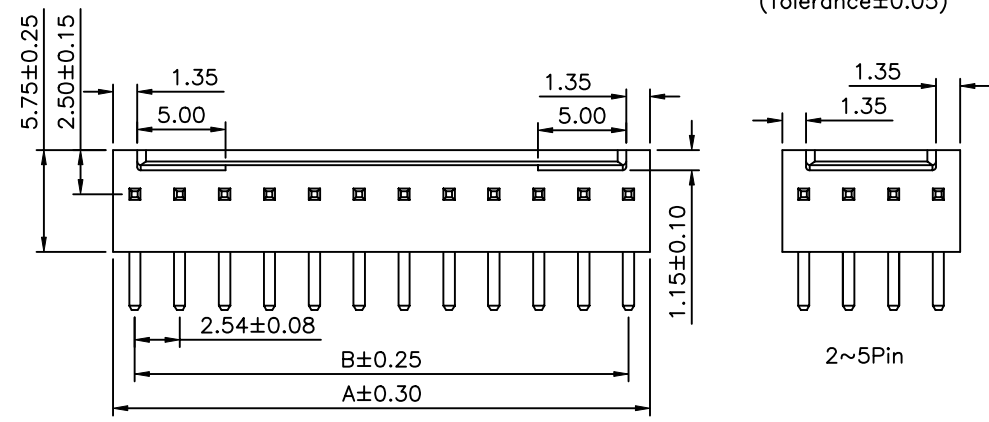

Pin	A	B
02	4.98	2.54
03	7.52	5.08
04	10.06	7.62
05	12.60	10.16
06	15.14	12.70
07	17.68	15.24
08	20.22	17.78
09	22.76	20.32
10	25.30	22.86
11	27.84	25.40
12	30.38	27.94
13	32.92	30.48
14	35.46	33.02
15	38.00	35.56
16	40.54	38.10
17	43.08	40.64
18	45.62	43.18
19	48.16	45.72
20	50.70	48.26

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.20 .XXX ±0.10 .XX* ±1°					
PART No. MKXXL-H		CHECKED BY HZF							
DRAWING No. MKXXL-H		DRAWING BY HYY							
SCALE	NONE	REV.	A0		UNIT mm	⊕	△ A0	NEW RELEASE	HZF
						NO.REV.	REVISIONS	CHK	DATE