


SPECIFICATION
 △ Current Rating:4A AC/DC
 Voltage Rating:250V AC/DC
 Withstand Voltage:1000V AC/Minute
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:PA66 UL94V-0,Beige
 RoHS Compliant

MK XX H - H
 (1) (2) (3) (4)
 (1) MK:2.54 MK
 (2) XX:No. Of Position/Per Row
 (3) H:Female Housing
 (4) H:RoHS Compliant

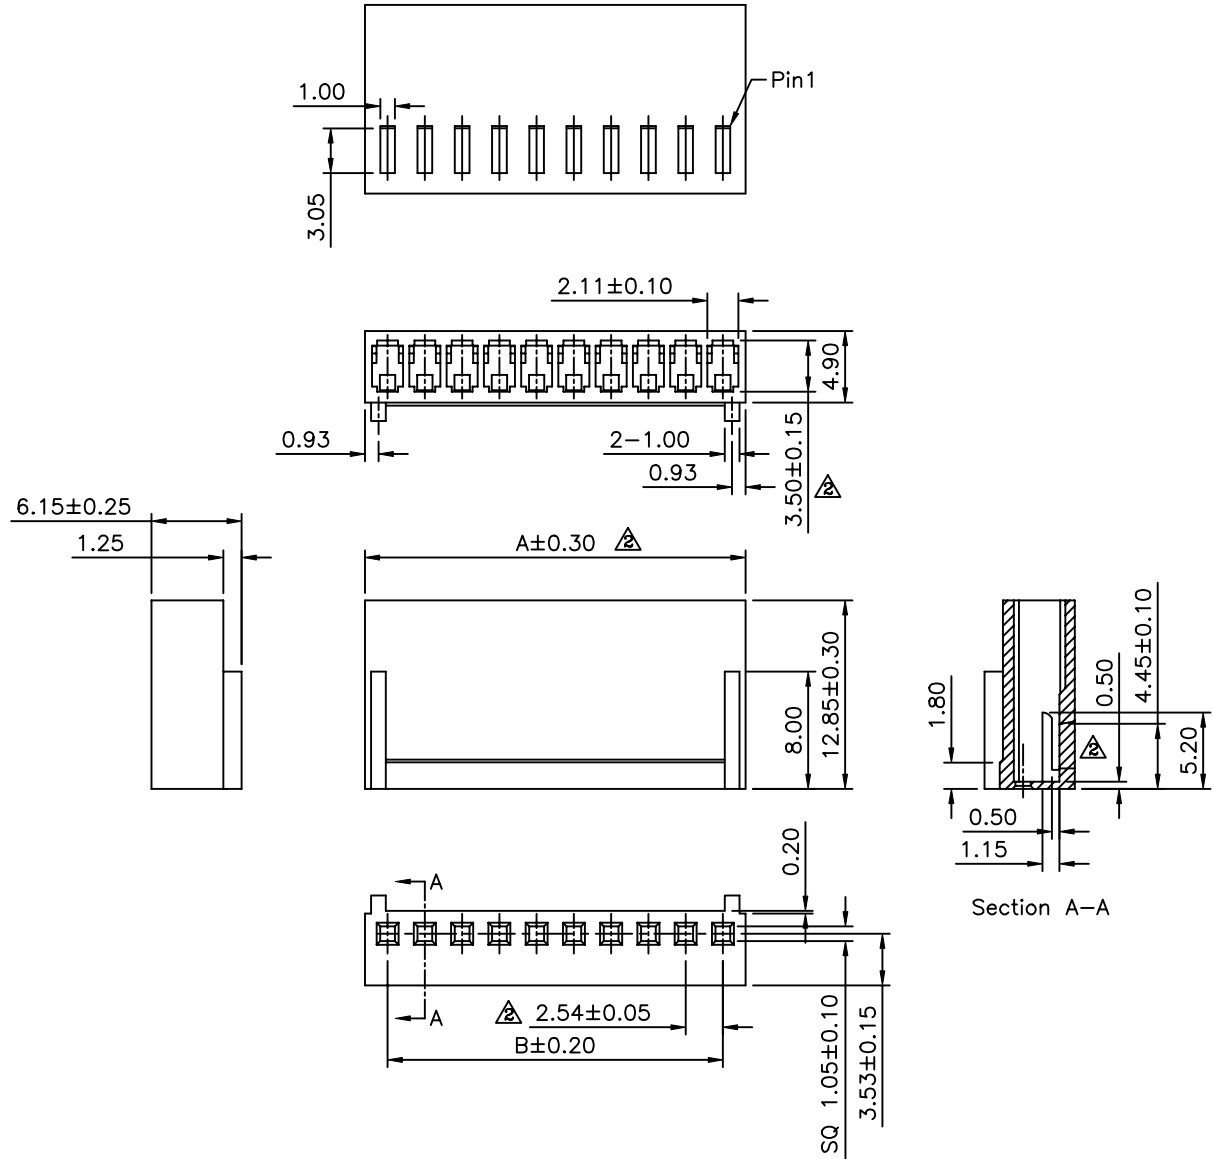

Pos.	A	B
2	5.63	2.54
3	8.17	5.08
4	10.71	7.62
5	13.25	10.16
6	15.79	12.70
7	18.33	15.24
8	20.87	17.78
9	23.41	20.32
10	25.95	22.86
11	28.49	25.40
12	31.03	27.94
13	33.57	30.48
14	36.11	33.02
15	38.65	35.56
16	41.19	38.10
17	43.73	40.64
18	46.27	43.18
19	48.81	45.72
20	51.35	48.26

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.20 .XXX ±0.10 .X° ±2° .XX° ±1°
PART No.		MEI		
DRAWING No.		HZF		
MKXXH-H		WZL		
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	11/07/2009
△ A1		RKXXH → MKXXH	BECKY	08/04/2006
△ A0		NEW RELEASE	BECKY	05/27/2005